

HILEE MARKETING INC.

KOREAN BBQ SYSTEMS

2026

PRODUCT CATALOG

WE LOOK FORWARD TO THE
OPPERTUNITY TO WORK
WITH YOU AND YOUR
BUSINESS!



KOREAN BBQ EQUIPMENT

Hello@hileemarketing.com



Hileemarketing.com



888-926-4619





**KOREAN CUISINE IS A
VIBRANT AND INTEGRAL
PART OF KOREAN CULTURE,
KNOWN FOR ITS BOLD
FLAVORS, DIVERSE
INGREDIENTS, AND
COMMUNAL DINING STYLE**

KOREAN BBQ

Korean BBQ, or "gogi-gui," is a popular Korean culinary tradition where diners grill their own meat at the table. This interactive dining experience often features a variety of marinated and non-marinated meats such as beef, pork, and chicken, which are cooked on a charcoal or gas grill built into the dining table. The meats are usually accompanied by an abundance of side dishes called "banchan," which can include kimchi, pickled vegetables, and seasoned greens. Diners often wrap the grilled meat in lettuce leaves along with rice, garlic, and ssamjang (a thick, spicy paste), creating a delicious and customizable bite. The communal nature of Korean BBQ fosters a convivial atmosphere, making it a favorite for gatherings and celebrations.

K B B Q





KOREAN BBQ

TABLE GRILLS
&
HOODS

BM-B-HOOD Retractable

K-BBQ Exhaust Hood

Type -A


FEATURES

Length	1625mm (extended to 1700mm)
Weight	12kg
Material	SUS304
Airflow	200CFM
Surface Temp.	661F (MAX)
Capacity of Grease	150ML
Collector pipe	Possible
Additional Detachments	Trumpet, Light Cover
Load Capacity per pallet	21 PCS

Certified by Underwriters Labatory



Additional Accesories

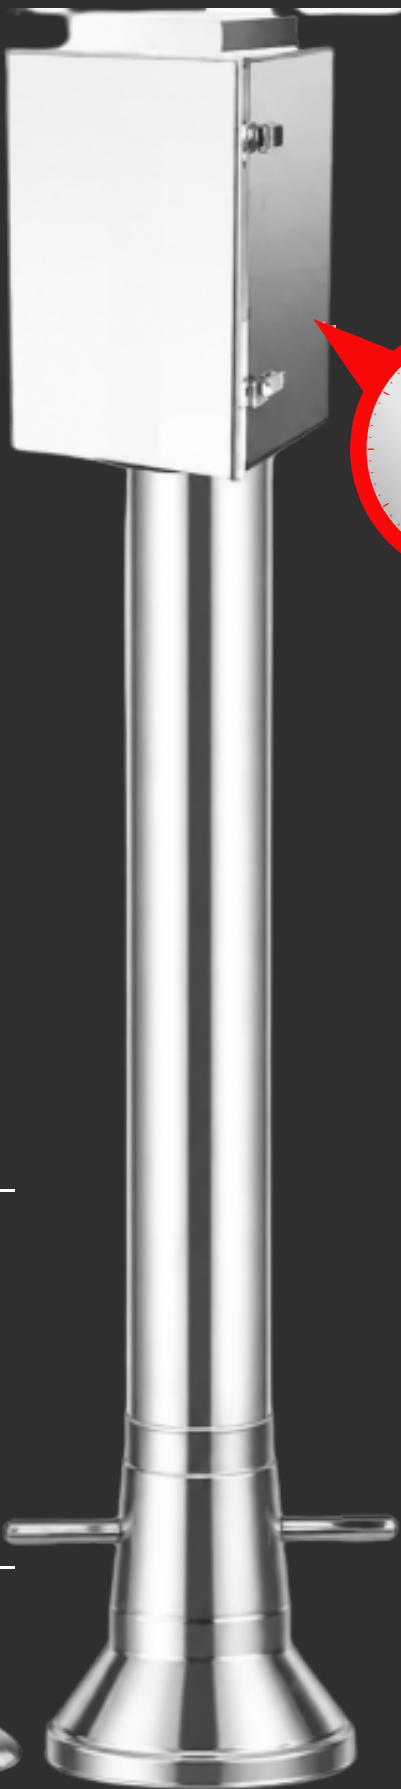

Korean-BBQ EXHAUST HOOD

Grease Filter Box
7-7/8"x9-3/4"x7-7/8"
SUS 304 Stainless Steel

7" X 8" X 1"
Grease Filter

6" X 6" Exhaust Collar

Fire Suppression
System
(Installed by other)

Gasket-Koowool
500 Glued with
Spray silicon 3m

1/4" 304 Stainless
Steel Rod Attached
by welding

Hood
Assembly


Twist Lock

Fixed Device

Grease Collector

Minimum
Overtop 10'
Between Outer
and inner tubing
with 6' Hood to
cooking surface
clearance

Table with
BBQ Grill

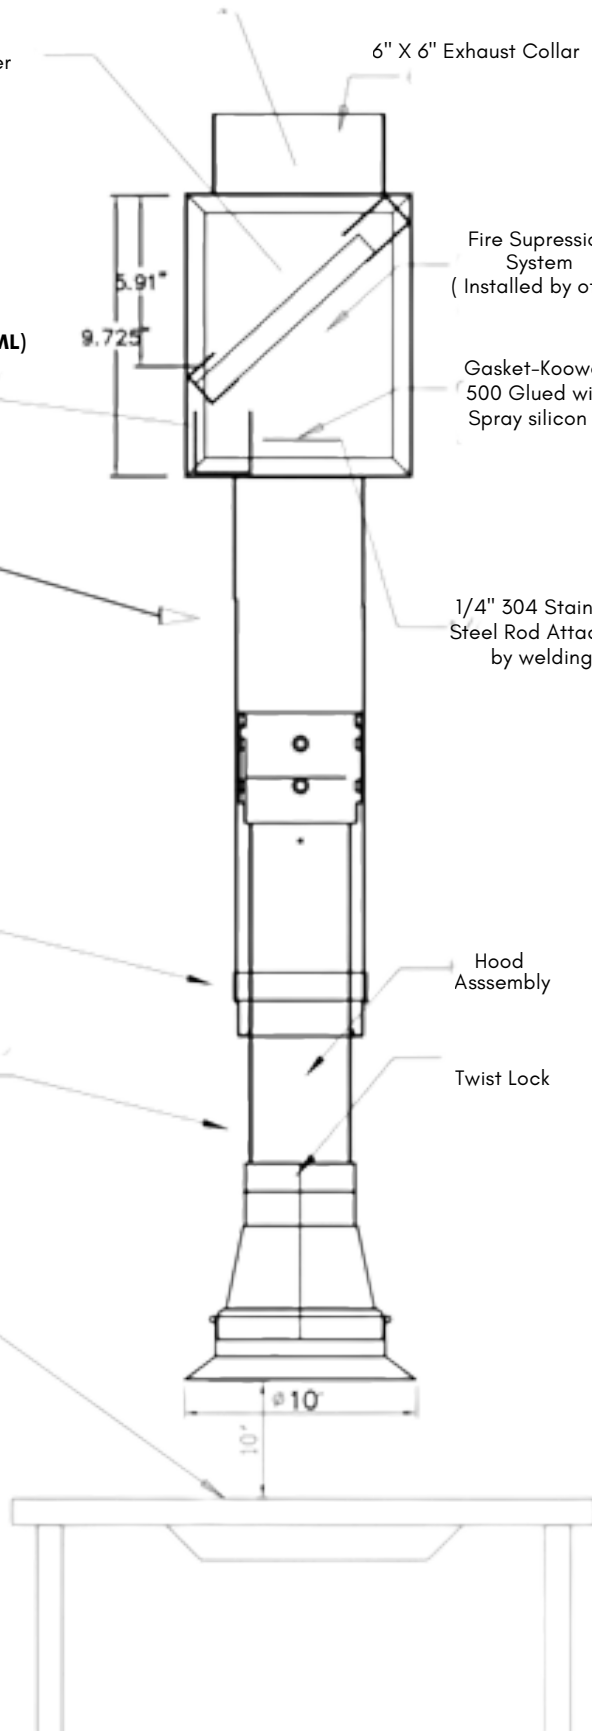

BM-B-HOOD is designed for exhaust air applications and is used with UL listed blower (fan) assemblies.

The blower must discharge a minimum of 40 inches above the roof surface and exhaust duct must be liquid tight welded construction to minimum of 18 inches above the roof surface

This installation must confirm with local code and the National Fire Protection Association [NFPA]

The installation must be confirmed with local code and NFPA 95, Removal of smoke and Grease-laden vapors for commercial cooking equipment.

Hood assembly is made of 18-gauge stainless steel with twist lock connection mechanism and it comes pre-assembled.

The exhaust air flow rates were established under controlled laboratory conditions and greater exhaust is required for complete vapor and smoke removal in specific installations.

Air Flow: Minimum 200 CFM


Maximum: Surface Temp. of cooking Appliance: 400F

Start with attaching factory assembled hood system to 6" X 6" duct by welding them together.

Model BM-B-HOOD is shipped fully assembled except the hood collar attached to exhaust duct.

The hood assembly is twist-lock for easy removal.

Please contact us if there is any damage on door gasket



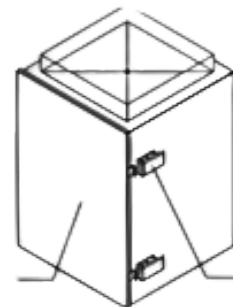


Access Door

Door Lock




Product Composition

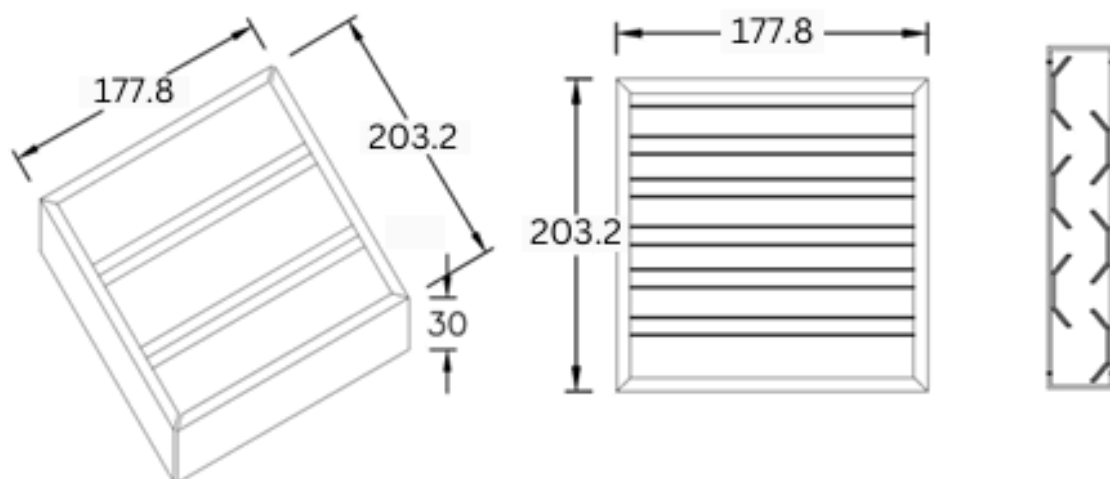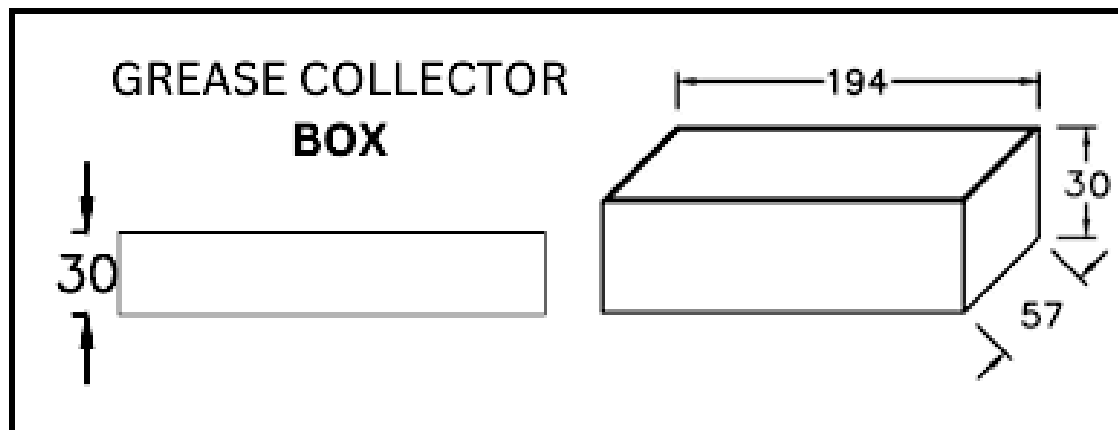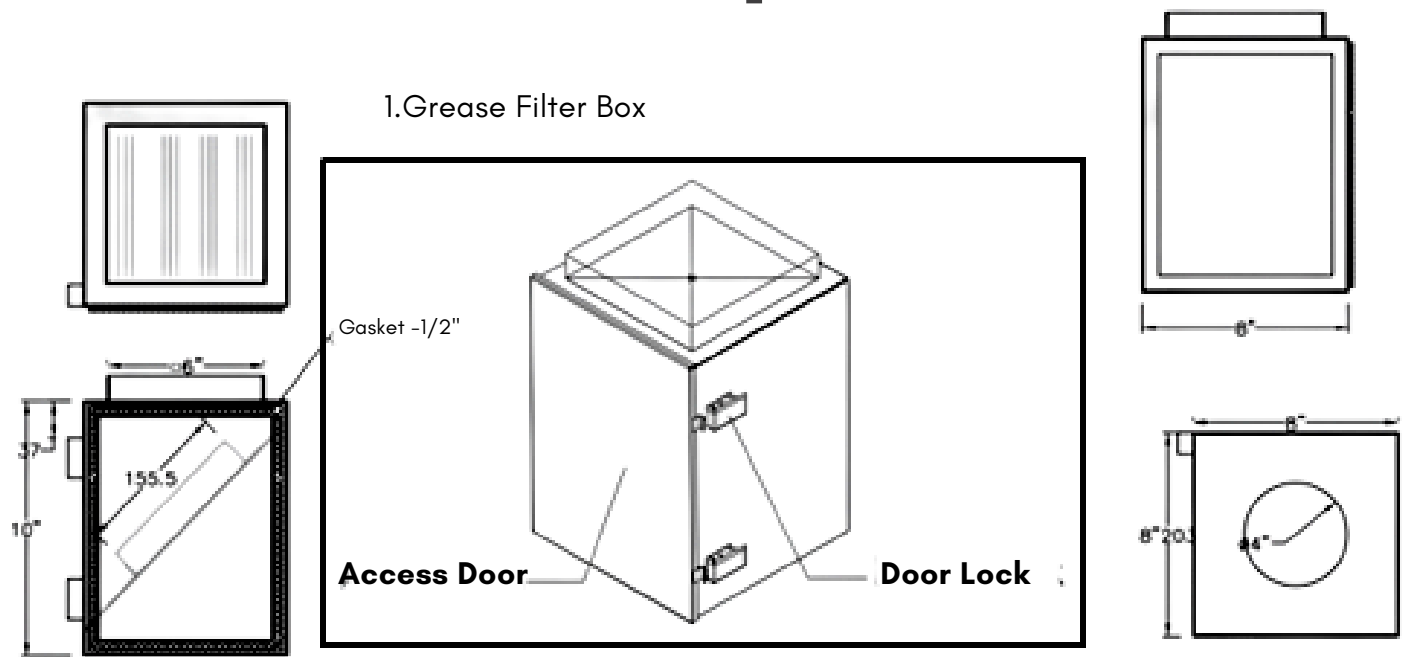

GREASE FILTER

GREASE FILTER
UL CERTIFIED




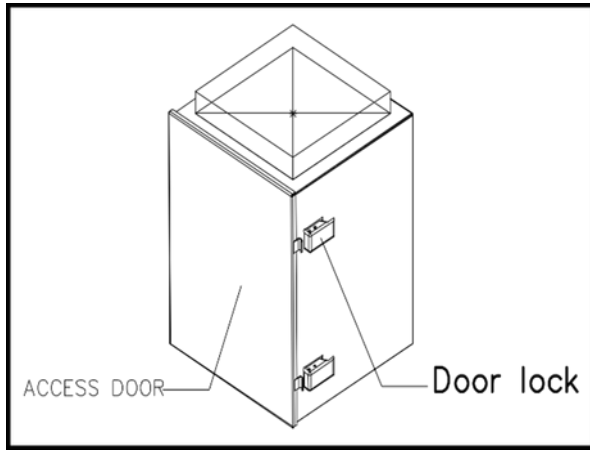

INCLUDED COMPONENTS:

- Grease Filter Box
- UL Certified Grease Baffle Filter
- Grease Collector

APPROVED BY

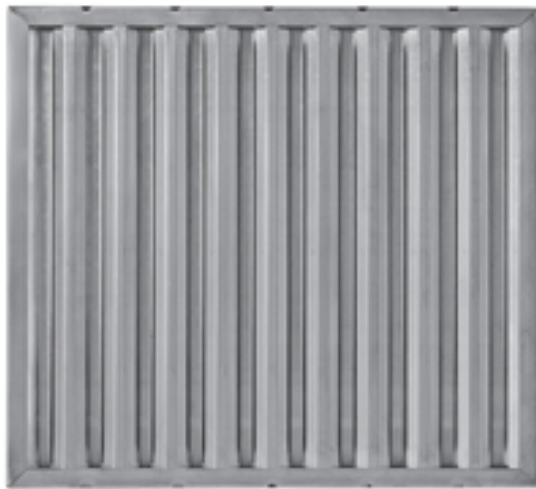

GREASE FILTER

- Available In Aluminum, Galvanized Steel, And Stainless Steel
- UL Classified
- Meets Requirements Of NFPA Standard 96
- Low Resistance



GREASE FILTER BANK

APPROVED BY



BM-B-HOOD Retractable

K-BBQ Exhaust Hood

Type -B

FEATURES


Length	1625mm (extended to 1700mm)
Weight	13kg
Material	SUS304
Airflow	123CFM
Surface Temp.	700F (MAX)
Capacity of Grease	150ML
Collector pipe	Possible
Additional Detachments	Trumpet, Light Cover
Load Capacity per pallet	21 PCS

Certified by Underwriters Labatory



Knowing the names of the product's components is useful when installing and using the product. **BOTTOM LIST**

1. FILTER BOX ASSEMBLY
2. GREASE FILTER ASSEMBLY
3. FILTER GREASE COLLECTOR
4. HOOD PIPE ASSEMBLY
5. SPRING BALANCER
6. ASSEMBLY
7. PIPE CONNECTOR
8. HOOD GREASE COLLECTOR

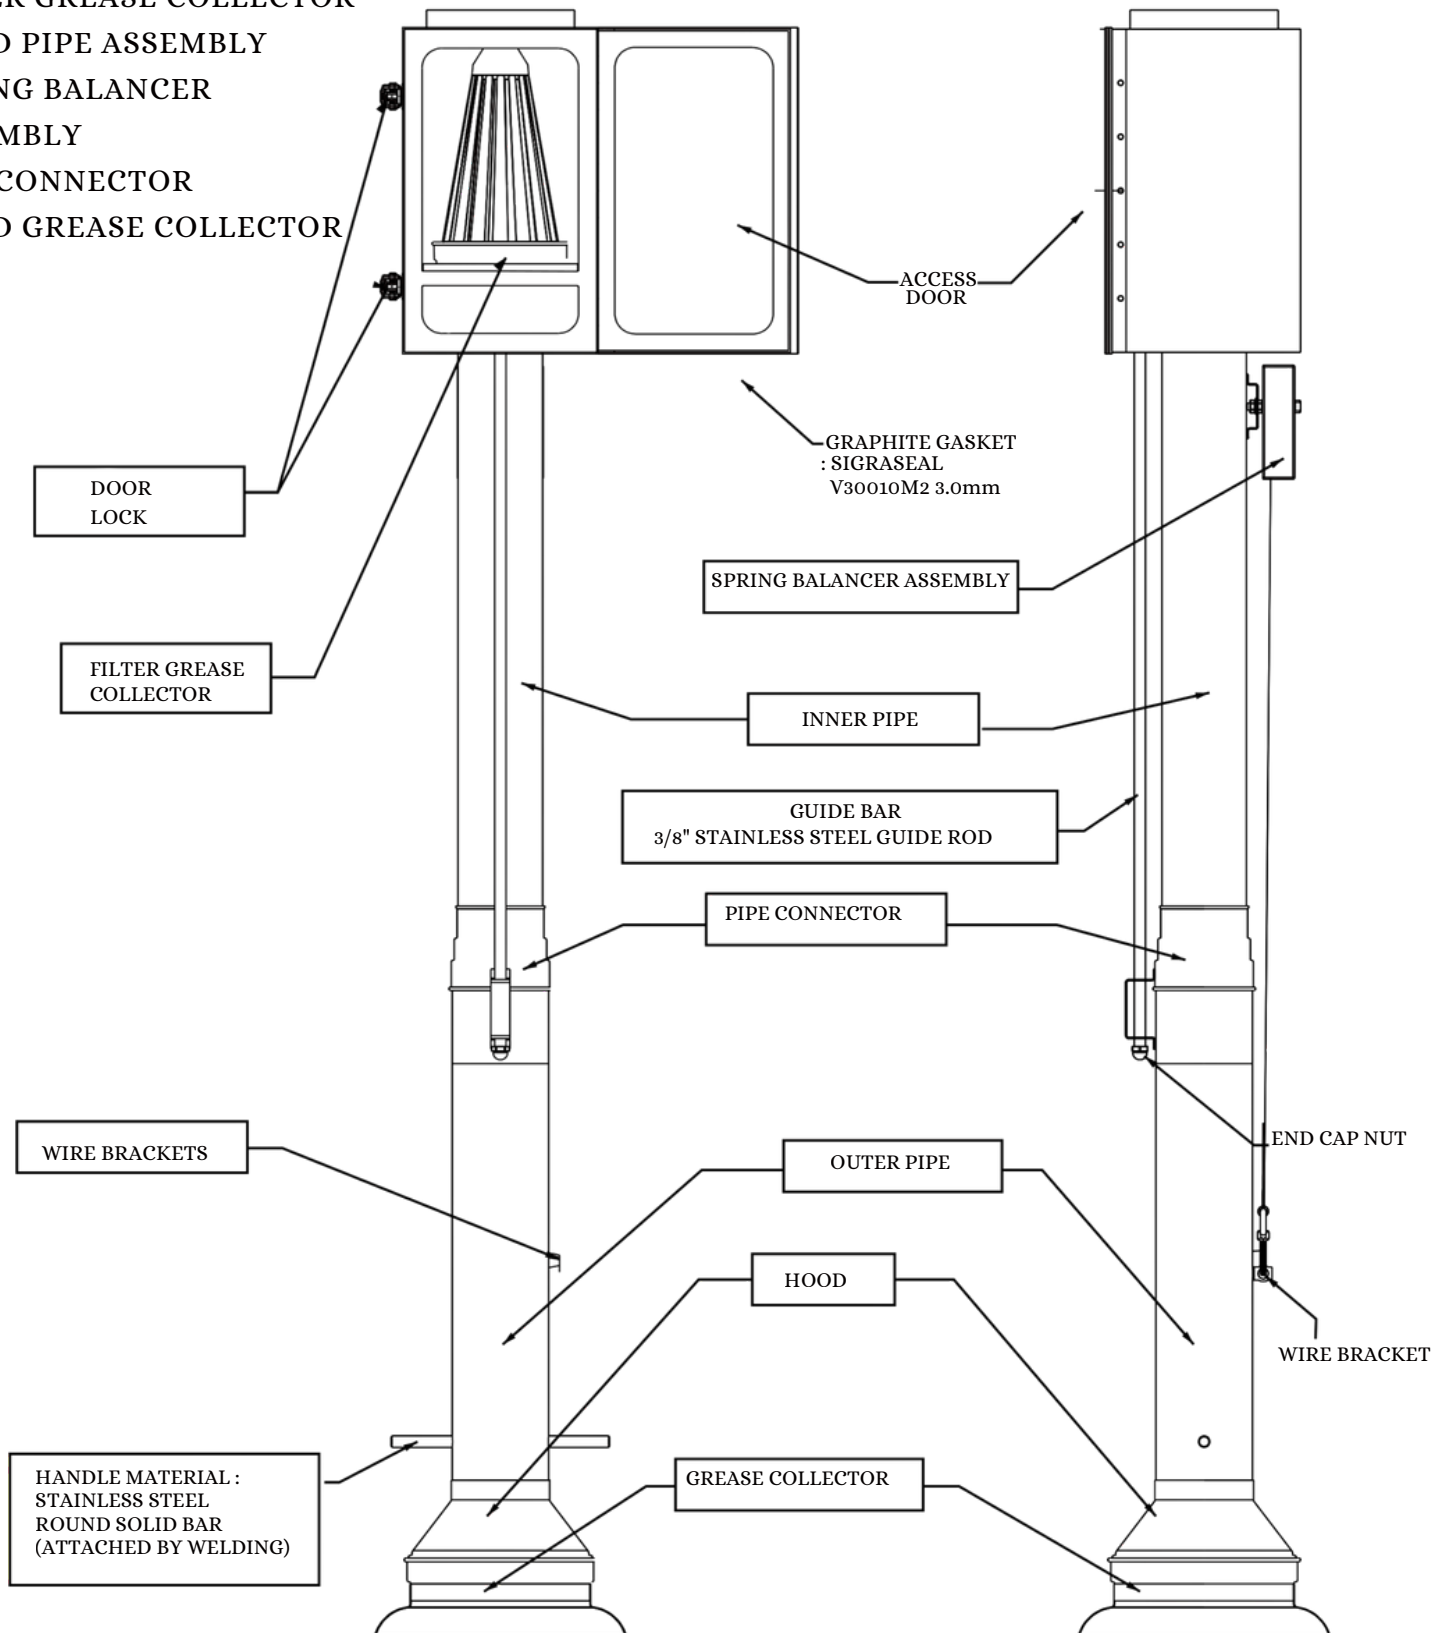

Cleaning Steps

Bottom Grease Collector

- Rotate the product to the right to detach the part.
- Wash the accumulated grease in the collector with hot water and detergent.
- Use a soft sponge to remove the grease.

Filter Box

- Open the product door and carefully remove the filter and grease collector.
- Wipe the interior with a soft cloth, and if heavily soiled, gently scrub with a brush.
- The filter holder is welded to the filter box. Use a small brush to remove grease from the weld area.
- When separating the filter from the filter box, be careful to prevent oil from leaking out of the grease collector.

Filter

- Separate the filter into upper and lower sections, wearing gloves for safety.
- Use a grease removal detergent and warm water to wash the filter, then rinse thoroughly.

Body (Inner and Outer Pipes)


- To separate the inner (upper) and outer (lower) pipes, lift the pipe connector.
- The outer pipe (lower) is fully detachable and can be cleaned separately.
- When cleaning the inner surface of the outer pipe (lower), use a neutral cleaning detergent and a dry cloth to remove any remaining grease.
- For the inner pipe (upper), supply water through the filter box and use a long brush to clean the interior of the pipe.
- When cleaning the inner pipe (upper), wipe thoroughly with a soft cloth to prevent residual grease from remaining on the ball bearings.
- The ball bearings can be separated from the pipe interior by applying pressure.
- If complete grease removal is difficult, consider replacing the parts.
- When cleaning the pipe connector, use a cleaning cloth with a stick to gently wipe the inner pipe and crevices.

10





BM-SDS-3200

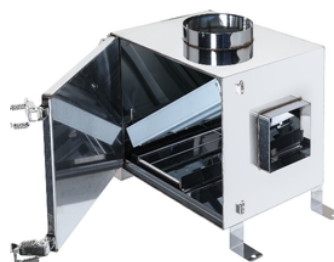

BM-SDS-3200C

SPECIFICATIONS

MODEL NUMBER	SDS-3200	
DIMENSIONS	WIDTH	390 MM
	LENGTH	390 MM
	HEIGHT	405 MM
WEIGHT		27.5LB
GAS INPUT		9,220 BTU
GAS CONNECTION	½ FLARE	




HI LEE MARKETING INC



APPROVED BY



TABLE CUT SHEET

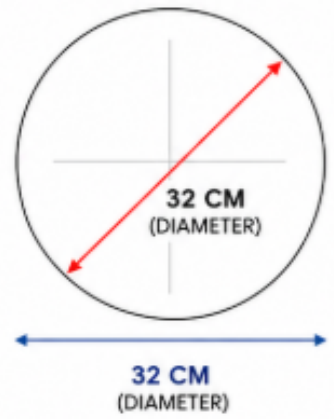

SPECIFICATIONS

MODEL NUMBER	BM-280G,	
DIMENSIONS	WIDTH	295 MM
	LENGTH	295 MM
	HEIGHT	245 MM
WEIGHT		14.0LB
GAS INPUT		9,220 BTU
GAS CONNECTION	½ FLARE	


HI LEE MARKETING INC



APPROVED BY



TABLE CUT SHEET



SPECIFICATIONS

MODEL NUMBER	BM320G	
DIMENSIONS	WIDTH	385 MM
	LENGTH	385 MM
	HEIGHT	245 MM
WEIGHT		16.7LB
GAS INPUT		9,220 BTU
GAS CONNECTION	½ FLARE	

HI LEE MARKETING INC



SPECIFICATIONS		
MODEL NUMBER	BM340G	
DIMENSIONS	WIDTH	500 MM
	LENGTH	360 MM
	HEIGHT	165MM
WEIGHT		18.5LB
GAS INPUT		10,000 BTU
GAS CONNECTION	½ FLARE	
HI LEE MARKETING INC		



APPROVED BY



Butane Gas Roaster With Ignition

Commercial Grade Round Butane Gas Roaster for Restaurants: Streamlined, Professional Grilling Solution



INCLUDED COMPONENTS:

- Cooking Pot Holder
- Water Pan
- Inner Pot
- Inner Pot Cover
- Pot Holder
- Grill Cover



APPROVED BY





HILEE MARKKETING INC

INDUCTION COOKER

HI POWER COMMERCIAL INDUCTION COOKER

Under Table Stainless Steel
Multi-Purpose Induction



DIGITAL BUTTONS



MODEL:
BM-B-INDUCTION


MODEL:
BM-B-BRACKET



HILEE INDUCTION
BRACKET
(SOLD SEPERATE)

PRODUCT INFORMATION

Material:	Stainless Steel
Special Feature:	Even heating at low power
Brand:	Hilee Marketing Inc.
Heating Elements:	1
Product Dimensions:	17"D x 14"W x 5"H
Wattage:	1800 Watt-hours
Controls Type:	Digital button
Voltage:	120 Volts / 60 Hz
Burner type:	Sealed
Power Source:	Induction
Item Weight:	14 lbs

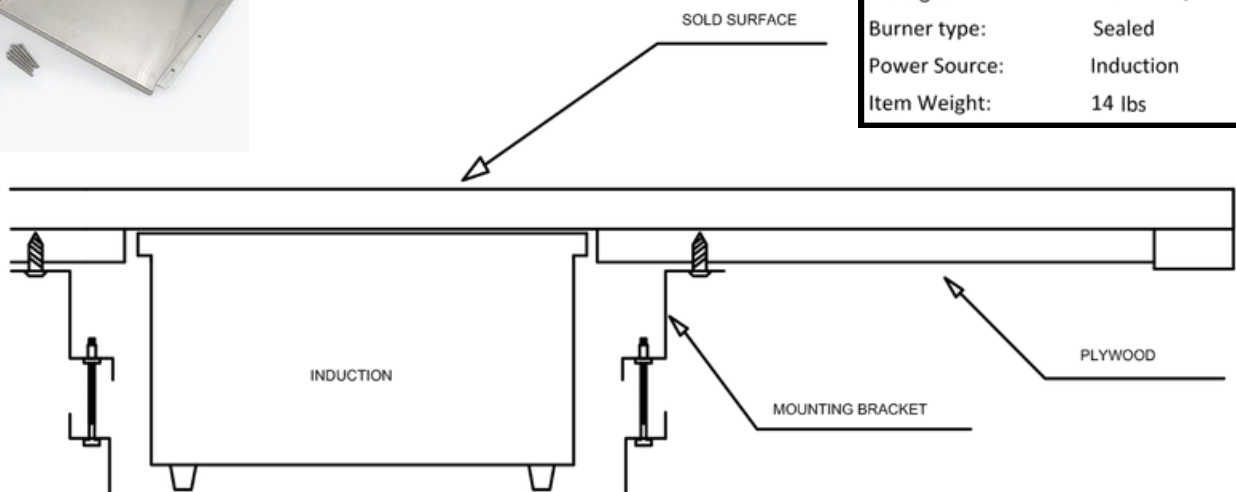

HILEE INDUCTION MOUNTING BRACKETS

Under Table Stainless Steel Table Mounting Bracket





INCLUDED COMPONENTS:

- 18 Gage Stainless Steel Table Mounting Brackets (2)
- 18 Gage Stainless Steel Base (1)
- 45MM Stainless Steel Screw (6)

MODEL:

BM-B-BRACKET

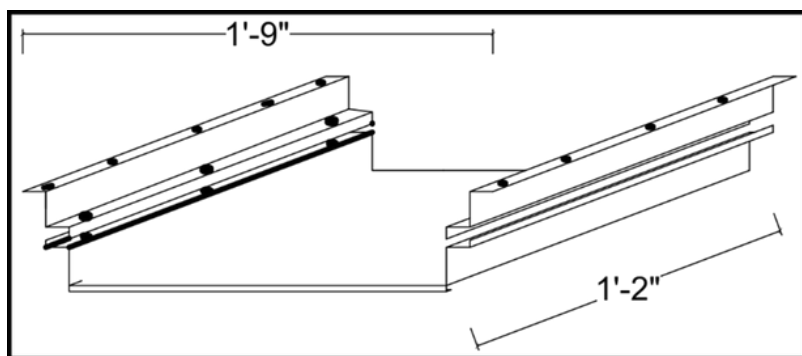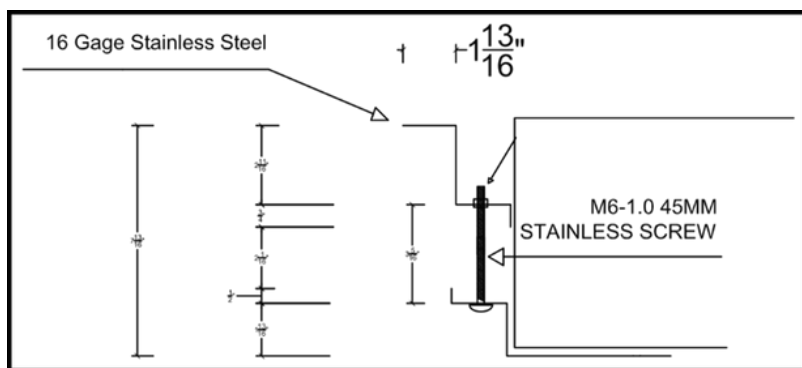

Induction bracket

Product information

Material:	16 GAGE Stainless Steel
Brand:	Hilee Marketing Inc.
Product Dimensions:	21"D x 14"W x Adjustable
Controls Type:	Stainless Steel Screw
Item Weight:	6lbs



KOREAN - BBQ

SYSTEM TABLES

KOREAN BBQ SYSTEM TABLES

Commercial Grade Restaurant
Table Top/Base




KOREAN BBQ RESTAURANT TABLE TOP



PRODUCT INFORMATION:

FORMICA BLACK MARBLE

- 1. 34"X72"
- 2. 34"X64"
- 3. 34"X52"




FORMICA WHITE MARBLE

- 1. 34"X72"
- 2. 34"X64"
- 3. 34"X52"



FLAT BOLT DOWN TABLE BASE

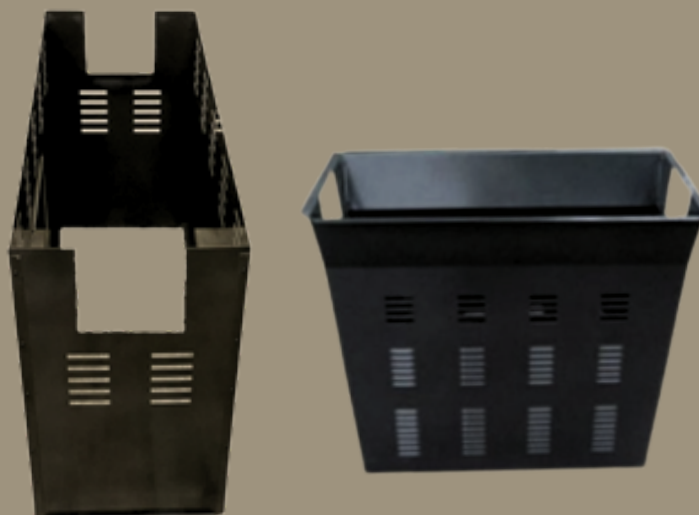

KOREAN BBQ TABLE BOX BASE

KOREAN BBQ SYSTEM TABLES

Commercial Grade Restaurant
Table Top/Base



Cherry



Cherry



Mahogany



Mahogany



Walnut



Walnut



Round	Square	BBQ Table
24"	24"x24"	34"x48"
30"	30"x24"	34"x52"
32"	30"x30"	34"x60"
36"	30"x48"	34"x72"
42"	30"x60"	
48"	30"x72"	

Features: Resin Top

Finishes: Natural, Cherry, Mahogany, Walnut

Available Thickness: 1" 1/4"

